


CLASSIC RIB®

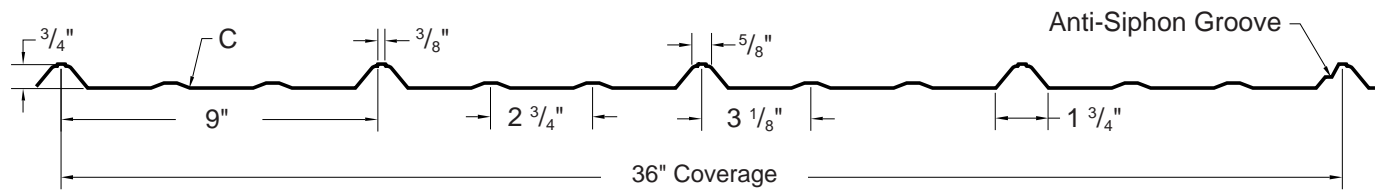

COMMERCIAL
RESIDENTIAL
PANEL

DIRECT
FASTEN


36"
COVERAGE

MINIMUM
3:12 SLOPE

OPEN FRAMING OR
SOLID SUBSTRATE

PANEL OVERVIEW

- ▶ Finishes: MS Colorfast45® and Acrylic Coated Galvalume®
- ▶ Gauge: 26ga and 29ga standard
- ▶ 36" panel coverage, 3/4" rib height
- ▶ Bell top trapezoidal rib on 9" centers
- ▶ Exposed fastened, low profile panel
- ▶ Applies over open framing or solid substrate
- ▶ Minimum roof slope: 3:12

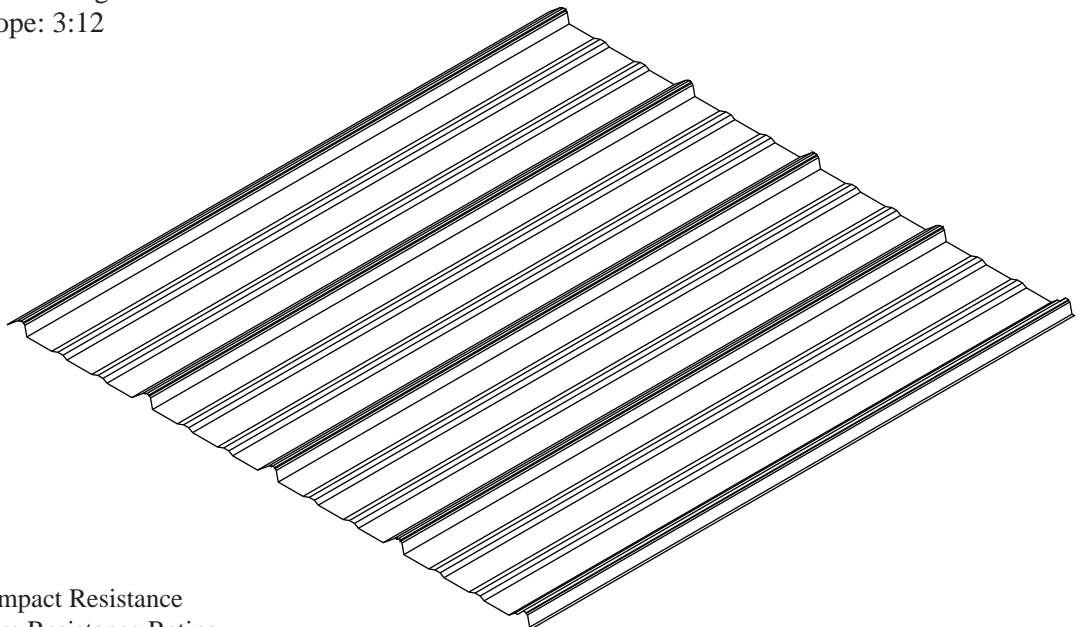

TESTING

- ▶ UL 2218, Class 4 Impact Resistance
- ▶ UL 790, Class A Fire Resistance Rating
- ▶ Miami-Dade County Approved 06-0410.08
- ▶ UL 580 Class 90 Wind Uplift Construction Numbers 560, 584
- ▶ Florida Building Code Approved 5807.6, 6821.1, 7490.1, 7490.2, 7231.2, 7416.1

metal sales
manufacturing corporation

