


PRO-PANEL II®

CONDENSED
TECHNICAL
REFERENCE

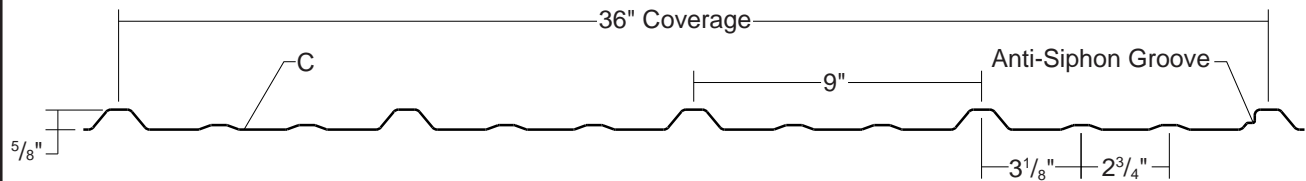

ARCHITECTURAL
COMMERCIAL
PANEL

DIRECT
FASTENED


36"
COVERAGE

MINIMUM
SLOPE
3:12

OPEN FRAMING OR
SOLID SUBSTRATE

PANEL OVERVIEW

- ▶ Finishes: MS Colorfast45® and Acrylic Coated Galvalume®
- ▶ Gauges: 26ga and 29ga standard
- ▶ 36" panel coverage, 5/8" rib height
- ▶ Trapezoidal ribs on 9" centers
- ▶ Applies over open framing or solid substrate
- ▶ Exposed fastener, low profile panel
- ▶ Minimum roof slope 3:12

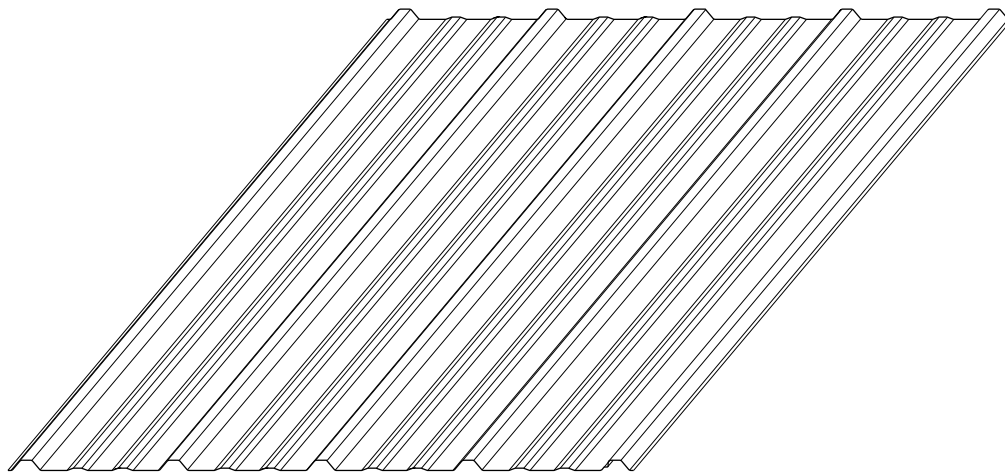

TESTING

- ▶ UL 2218, Class 4 Impact Resistance
- ▶ UL 790, Class A Fire Resistance Rating
- ▶ 2004 Florida Approval #8131.3


metal sales
manufacturing corporation




PRO-PANEL II®

CONDENSED TECHNICAL REFERENCE

ATTACHMENT DETAIL

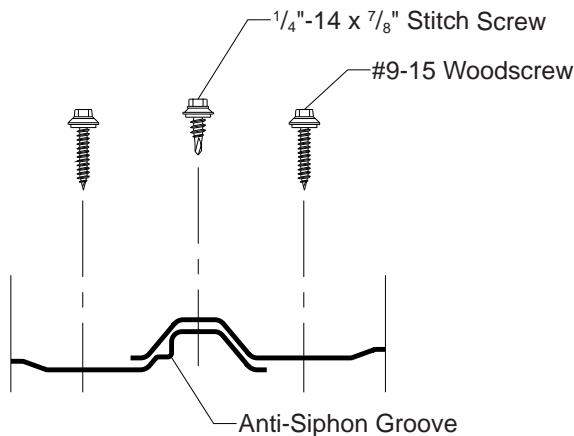

FASTENING PATTERN

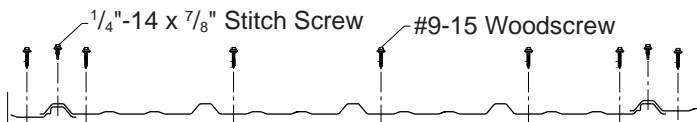

GENERAL INFORMATION

► Slope

The minimum recommended slope for Pro-Panel II® roof panel is 3:12.

► Substructure

Pro-Panel II® is designed to be utilized over open structural framing, or a solid substrate. To avoid panel distortion, use a properly aligned and uniform substructure.

► Coverage

Pro-Panel II® panels are available in a 5/8" rib height with a coverage width of 36".

► Length

Minimum factory cut length is 5'-0". Maximum recommended panel length is 45'-0". Longer panels require additional consideration in packaging, shipping, and erection. Please consult Metal Sales for recommendations.

► Fasteners

The fastener selection guide should be consulted for choosing the proper fastener for specific applications. Quantity and type of fastener must meet necessary loading and code requirements.

NOTE: All panels are subject to surface distortion due to improperly applied fasteners. Overdriven fasteners will cause stress and induce oil canning across the face of the panel at or near the point of attachment.

► Availability

*Finishes: Acrylic Coated Galvalume® or MS Colorfast45®
Gauges: 26ga and 29ga standard*

SECTION PROPERTIES

ALLOWABLE UNIFORM LOADS PSF (3 or More Equal Spans)

Ga.	Width (in.)	Yield KSI	Weight PSF	Top in Compression				Bottom in Compression				Inward Load						Outward Load											
				lxx In ² /ft		Sxx In ³ /ft		lxx In ² /ft		Sxx In ³ /ft		1'			1.5'			2'			2.5'			3'			3.5'		
				1'	1.5'	2'	2.5'	3'	3.5'	1'	1.5'	2'	2.5'	3'	3.5'	1'	1.5'	2'	2.5'	3'	3.5'	1'	1.5'	2'	2.5'	3'	3.5'		
29	36"	80	0.71	0.0067	0.0134	0.0053	0.0137	89	59	41	28	19	10	87	57	40	28	19	10	87	57	40	28	19	10				
26	36"	80	0.87	0.0087	0.0179	0.0067	0.0168	112	74	52	35	23	12	115	76	54	35	23	12	115	76	54	35	23	12				

- Theoretical section properties have been calculated per AISI 2001 "Specification for the Design of Cold-formed Steel Structural Members." lxx and Sxx are effective section properties for deflection and bending.
- Allowable load is calculated in accordance with AISI 2001 specifications considering bending, shear, combined bending and shear and deflection. Allowable load considers the worst case of 3 or 4 equal span conditions. Allowable load does not address web crippling or fastener/support connection and panel weight is not considered.
- Deflection consideration is limited by a maximum deflection ratio of L/180 of span.
- Allowable loads do not include a 1/3 stress increase in uplift.

metal sales
manufacturing corporation



Kent, WA (800) 431-3470
Temple, TX (800) 543-4415
Longmont, CO (800) 289-7663
Antioch, TN (800) 251-8508
Woodland, CA (800) 759-6019
Rogers, MN (800) 328-9316
Spokane, WA (800) 572-6565

Jefferson, OH (800) 321-5833
Rock Island, IL (800) 747-1206
Sellersburg, IN (800) 999-7777
Jacksonville, FL (800) 394-4419
Orwigsburg, PA (800) 544-2577
Independence, MO (800) 747-0012
Fontana, CA (800) 782-7953

Anchorage, AK (866) 640-7663
Bay City, MI (888) 777-7640
Detroit Lakes, MN (888) 594-1394
Mocksville, NC (800) 228-6119

©MS1280PP/12-2008